


MS5200

Smart grid medium voltage sensor with 0.5% voltage measurement

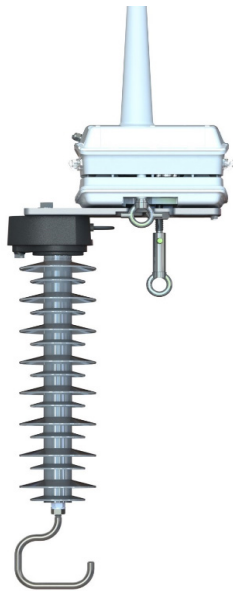

- Voltage measurement with 0.5% accuracy
- Reliable online detection of all types of faults and earthing systems including solid-grounded, floating neutral, SWER and Petersen coil
- Reduces the average interruption duration (SAIDI)
- Reducing number of faults by identifying weak spots (SAIFI)
- Powerful cyber security capabilities
- Unique proprietary algorithms to detect high impedance faults with high accuracy
- Power harvesting for line currents as low as 1.5A
- Radio communication for rural areas with no cellular coverage
- Connection to existing DMS systems
- Provides online grid visibility of currents, power flow etc.
- Reduces wildfire risk, increases safety
- Fast and easy installation

DESCRIPTION

MS5200 is an online wireless system for medium voltage overhead lines which complements distribution management systems and provides online information about faults and grid operations.

MS5200 is generally similar to MS5000 but with the addition of a connection to a ground reference for performing a direct voltage measurement instead of calculating the voltage from measurement of the electric field. The 0.5% accuracy of the voltage measurements makes MS5200 optimal for applications such as Volt/VAR optimization, medium voltage power metering and detection of technical and non-technical losses.

MS5200 is designed to operate in power grids with solid grounding and any other type of earthing including Petersen coil compensation.

By identifying weak spots and carrying out pre-emptive maintenance, the grid's reliability can be further improved.

The installation can be easily done with grip all hot stick.

The system is modular: Once sensors are deployed in a radio network, they automatically create a secured mesh network among themselves. When required, additional routers and sensors automatically and effortlessly connect to the network. The sensors report abnormal events such as surges, current/voltage drops and can be accessed at any time by the MetryView software.

The measurements of different sensors are synchronized with high precision by the radio and marked with timestamps.

The sensors constantly measure current and voltage and calculate various power quality parameters. The data is transmitted periodically (e.g. every 5 or 15 minutes) to the server.

The MS5200 is available in two versions:

- **MS5200-SU:** Sensor unit with radio communications. The unit can be connected to MS5000-GS sensor/gateway or to other MS5200/MS5000 sensors units or to MS3010 gateway or routers)
- **MS5200-GS:** Sensor unit with integrated cellular gateway

Typically, a set includes 2 x MS5200-SU + 1 x MS5200-GS or 3 x MS5200-SU, to cover three phases. The network size starts with three sensors and can include up to hundreds of sensors.

APPLICATIONS

- IVolt/VAR optimization
- Medium voltage power metering
- Power quality measurements
- Detection of technical and non-technical losses
- Grid analytics
- FLISR (Fault location, isolation, and service restoration)

MS5200

Smart grid medium voltage sensor with 0.5% voltage measurement

FEATURES


- **High accuracy:**
 - Voltage measurement: 0.5%
 - Current measurement: 0.5%
- **Extremely low power:**
 - Inductively powered from currents as low as 1.5A in low power mode
 - Backup batteries last for up to 3 years in low power mode
- **Maintenance-free operation for more than 10 years**
- **Robust design:**
 - Aluminum combined with glass filled polymeric material
 - IP67 rating
 - Operating temperature range of - 25 °C to 60 °C
- **Supports voltage from 4 kV up to 36kV**
- **Provides online grid visibility**
 - Currents and Voltages
 - Power flow (real and reactive)
 - Power quality
 - Power factor
 - Phase angle
 - Zero sequence data
 - Harmonics (measured up to 30th harmonic, presented: up to 5th)
 - Transient events
 - Arc waveforms
- **Supports IPv6 mesh Radio (6LoWPAN), and combined cellular & mesh**
- **Communication range between sensors: up to 10km, can be increased to tens of km with high gain antennas.**
- **Supports cellular 2G/3G/4G**
- **Scalable and flexible Radio Network**
- **Connects to the utility's communication infrastructure**

OPTIONAL OPERATION WITHOUT CELLULAR COVERAGE


A mesh radio network can be used to extend the communication range to tens of km, and thus reach remote sensors which are not covered by cellular networks and located far away from the nearest access point of the utilities' communication infrastructure. One gateway can access a single sensor, a small group of sensors (e.g., 3 - one for each phase), or up to hundreds of sensors over a range of tens of km when there is a requirement to reach sensor in remote rural areas.

The gateway can connect with the server via cellular communication or alternatively by interfacing directly with the substation's communication infrastructure.

EXAMPLE OF MESH RADIO NETWORK

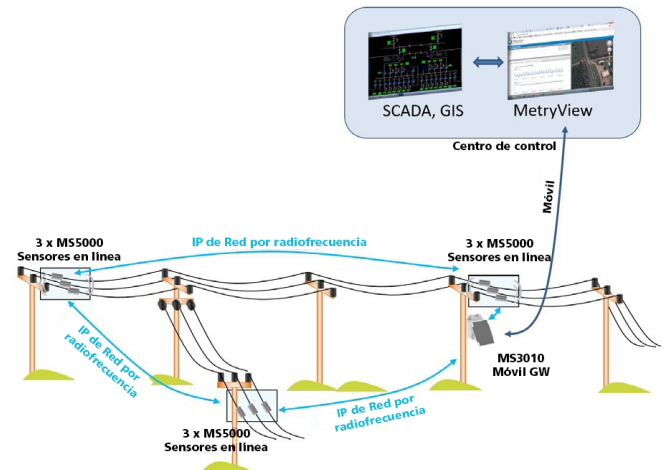

PHYSICAL DIMENSIONS IN MM

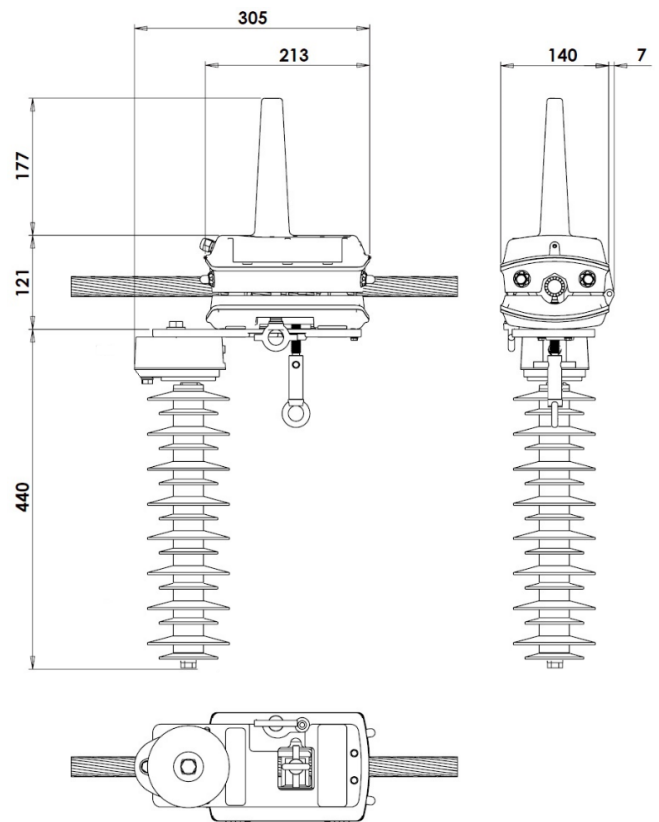

MS5200

Smart grid medium voltage sensor with 0.5% voltage measurement

TECHNICAL DATA

Installation options and power line parameters

Installation options	Using Grip-all hot-stick
Conductor diameter	6 - 32 mm
Line voltage(*)	36kV Max (phase to phase) 57kV 8h (phase to phase)
Dielectric resistance (*)	70kV Max
Lightning impulse (BIL) (*)	170kVp
Grounding options	Solid Grounding, Floating grounding, compensated grounding, SWER
Conductor external material	Aluminum (Default) Copper (with MS5000-AC-CP accessory)
Conductor temperature	100 °C Max
Short current	25kA (2sec) Max

CONTROL INTERFACES

Led indication	Indicates communication and fault local status
Push button	Controls power and triggers led indication
USB interface	Control interface for configuration

POWER OPTIONS

Power Feeding	1.5A for sensor (SU) in low power mode 3A for sensor (SU) with full functionality 5A for cellular sensor (GS) with full functionality
Typical Battery Life	10-20 years
Typical Backup time	3 years in low power mode (for MS5200-SU)

FAULT DETECTION

Events detected	Surge current (transient or permanent fault) Phase to GND fault including high impedance
Remote configuration	Threshold levels for fault detection Multiple optional parameters
Inrush current blocking time after reenergizing	3 sec (configurable)
Adjacent conductors	Indifferent to surge according to IEEE 495 4.4.8

PHYSICAL AND ENVIRONMENTAL

Chassis body dimensions	12.1 x 14.0 x 21.3 cm (4.76 x 44.9 x 8.39 inch)
Antenna length	17.7 cm (6.97 inch) - See figure above.
Voltage sensor length	44.0cm (17.3 inch) - See figure above.
Weight	6.2 kg
Casing	Upper and lower covers: Aluminum, Body: Glass filled polymeric material Mounting Screw: Stainless Steel IP67

Temperature range	-25°C to +60°C
--------------------------	----------------

MEASUREMENTS

Load current	Up to 600A nominal
Load current accuracy	0.5% Typical at 100A 600A 0.5A Typical at 20A 100A 0.25A Typical at 0A 20A 0.1A resolution
Voltage accuracy	0.5%
Periodic Measurements	Current and Voltage Power factor Phase angle Harmonics measured up to 30 th (Presented: up to 5 th)

Measurement interval	Each 15 minutes typical (programmable)
-----------------------------	--

Waveform Sampling and Voltage	4.096ksps default, 8.192ksps Max Current
--------------------------------------	--

Waveform trigger events

Phase to phase faults
Phase to ground faults
Current changes
Voltage changes

Alarms

Power Down
Heavy load current
Overload current
LED Blinking
Low power mode
Wait for reset mode
Low backup battery
Low Secondary Battery
Charging from backup

Phase synchronization	30µs Typical
------------------------------	--------------

Sampling Buffer	8 seconds
------------------------	-----------

CELLULAR COMMUNICATION

LTE-TDD B34/B38/B39/B40/B41
LTE-FDD B1/B2/B3/B4/B5/B7/B8/B12/B13/
B18/B19/B20/B25/B26/B28/B66
UMTS/HSPA + B1/B2/B4/B5/B6/B8/B19
GSM/GPRS/EDGE 850/900/1800/1900 MHz

Cyber Hardening End-to-end TLS/SSL, certificates enrollment, encrypted local radio communication between sensors, private APN and RADIUS, encrypted firmware upload, three levels of local access permissions

(*) Higher voltages can be supported with special order

IPV6 MESH RADIO COMMUNICATIONS

Protocols	6LoWPAN, RPL Routing
Modulation Type	GFSK, Frequency hopping
433 MHz Radio Option	
Frequency	433 MHz
Range⁽¹⁾	2 km
Carrier Power	10 dBm (10mW) Max

915MHZ RADIO OPTION

Frequency	921 - 928 MHz
------------------	---------------

MS5200

Smart grid medium voltage sensor with 0.5% voltage measurement

Range⁽¹⁾ 10km (tens of km with high gain antenna)

Carrier Power 30dBm (1W) Max


Notes:

(1) Range is estimated for high installation and direct line of sight. The radio range specification is for communication between MS5200 SU sensors.

Range of MS5200 SU to a MS3010 gateway/router can be increased to tens of km using MS3010 with high gain antennas. Cellular sensor MS5200 GS includes a smaller internal antenna and supports a radio range of at least 50m to nearby MS5200 SU sensors

ORDERING INFO

Product part number format: MS5200

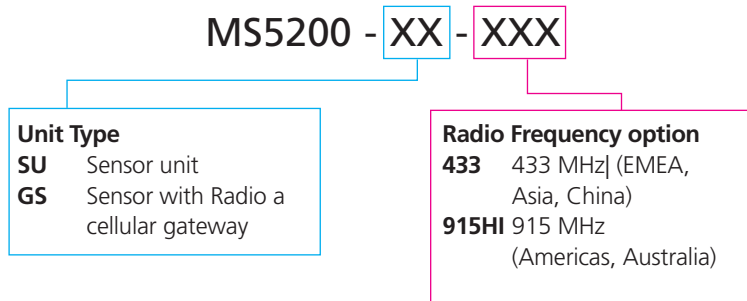

SALES OFFICE

Megger Limited
Archcliffe Road Dover
CT17 9EN England
T +44 (0) 1304 502101
E UKsales@megger.com

MS5200_DS_en_V01

www.megger.com
ISO 9001
The word 'Megger' is a registered trademark

Megger[®]